


RAPID[®] full thread

The best technical values - extremely reliable

Head types



Cylinder head

- > Reduced splitting so that wood surface does not splinter
- > Head is able to countersink deep into wood with a long bit
- > Improved force transfer thanks to deeper drive



90° countersunk head

- > Ideal for metal/wood connections
- > Fits perfectly into metal parts



Thread geometry

- > Constantly low torque due to anti-friction coating
- > Excellent thread pull-out values
- > Excellent pressure values
- > Maximum load-bearing capacity

By request, also available in:

- > Stainless steel A2 and A4 (approved for Φ 8.0 to 300 mm length and Φ 10.0 to 510 mm length),
- > alternative surfaces such as: zinc nickel



■ YellWin 500+ 

■ Stainless steel 

■ Zinc nickel 1000+ 

Patented tip - no pre-drilling necessary

- > Self-drilling tip with ridged core
- > Minimised splitting
- > 50 percent lower screw-in torque

Half tip (HSP)





- > Bites rapidly even with oblique and cross grained wood screw connections
- > Especially with long screws
- > Can be placed closer to the edge

Full tip with ridged core

- > Minimised splitting and bites into wood quickly



Dimensions

		Countersunk head	Cylinder head	HSP cylinder head
				
Ø 8.0	Drive	T 40	T 40	T 40
	Length	120–600 mm	120–400 mm	450–600 mm
	Thread	Single thread	Single thread	Single thread
	Tip	Half tip	Full tip	Half tip
Ø 10.0	Drive	T 50	–	T 50
	Length	120–1000 mm	–	200–1000 mm
	Thread	Single thread	–	Single thread
	Tip	Half tip	–	Half tip
Ø 12.0	Drive	T 50	–	–
	Length	200–1000 mm	–	–
	Thread	Single thread	–	–
	Tip	Half tip	–	–
Surface		YellWin 500+ 		

Note: Guide bores of 5 d recommended for L > 800 mm


RAPID[®] full thread

The best technical values - extremely reliable

Applications

SUPPORT REINFORCEMENT WITH STEEL PLATE AND FULL THREAD SCREWS (1)

RAPID[®] full thread screws transfer the support load from the timber section directly to the steel plate through the screw heads. They distribute the force evenly into the end grain of the support.

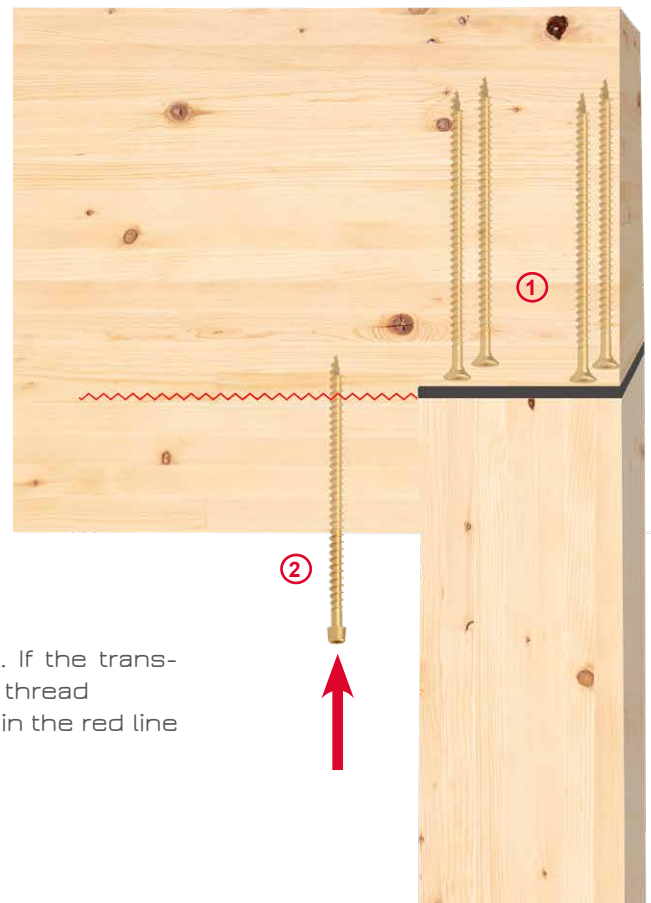

TRANSVERSE TENSILE REINFORCEMENT FOR NOTCHING (2)

The structural engineer must review the requirement. If the transverse tensile load is too high for the timber section, full thread screws will be used to reinforce and secure the beam in the red line area.



CONNECTIONS AT THE BASE POINT OF THE SUPPORT



RAPID[®] full thread screws with a countersunk head are best suited for this application. Shear forces and wind suction are effectively transferred. The RAPID[®] offers a high degree of security with 500 hours of corrosion resistance.

Info: In areas exposed to weather (use class 3), stainless steel screws should be used in accordance with the timber structure design code. The executive person should perform a final assessment of the necessary corrosion protection.

CROSS LAMINATED TIMBER (CEILING RIB)

Shear-resistant crosswise screwing for cross laminated timber ceilings.

TIP: the connection should first be pulled tightly together using e.g., partial thread screws. The pitch of the screws should be oriented in the direction of the main load.

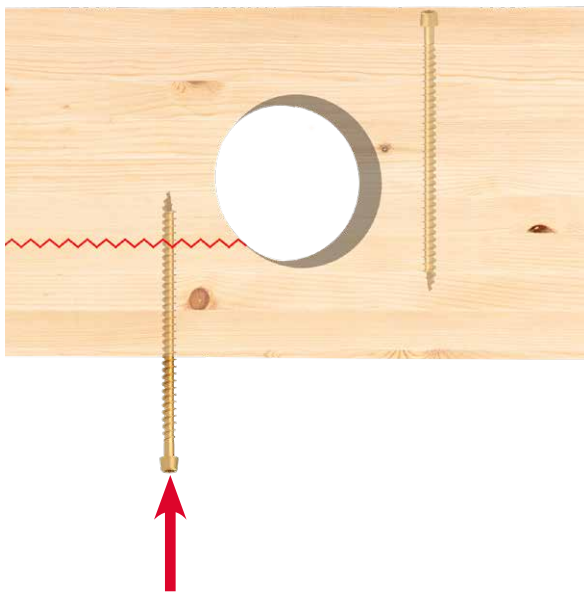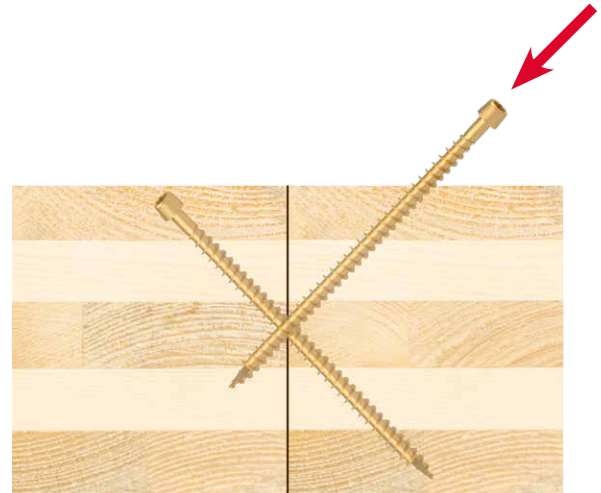

REINFORCEMENT OF OPENINGS WITH LONG FULL THREAD SCREWS

The area marked in red indicates the risk of cracking. The same thread length is required above and below this marking.


Long full thread screws with cylinder heads are recommended. They can be positioned exactly using long bits.



RAPID[®] full thread countersunk head


Values apply to the RAPID[®] full thread countersunk head with and without half tip

Characteristics and values for C24				
d	[mm]	ø 8	ø 10	ø 12
d_k	[mm]	15.0	18.5	21.0
d_i	[mm]	5.10	6.30	7.00
$f_{ax,90,k}$	[N/mm ²]	13.1	12.5	11.2
$f_{head,k}$	[N/mm ²]	12.4	12.2	10.3
$F_{tens,k}$	[kN]	24.1	40.0	46.7
$M_{y,k}$	[Nmm]	20 300	36 700	48 500
$N_{pl,k - kc}^{(*)}$	[kN]	12.2	18.9	23.6

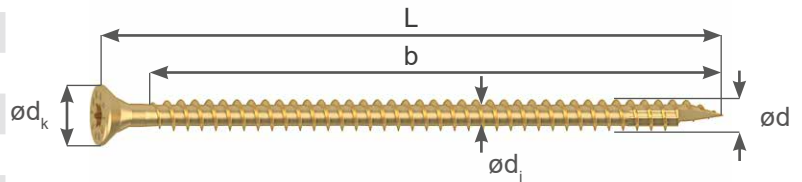

(*) total screw length in timber

		AXIAL 90°				SHEAR 90°					
		TIMBER - TIMBER		METAL - TIMBER		TIMBER - TIMBER		METAL - TIMBER			
		$l_{ef} = b/2$		$l_{ef} = b$		$l_{ef} = b/2$		$l_{ef} = b$			
	ø [mm]	L/b [mm]	$F_{ax,Rk}$	$F_{ax,ASD}$	$F_{ax,Rk}$	$F_{ax,ASD}$	$F_{V,Rk}$	$F_{V,ASD}$	$F_{V,Rk,thin}$	$F_{V,Rk,thick}$	$F_{V,ASD}$
			[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
ø 8.0	8.0	120/110	5.76	2.20	11.53	4.40	4.01	0.94	5.14	6.52	1.36
	8.0	140/130	6.81	2.60	13.62	5.20	4.27	1.09	5.14	7.04	1.36
	8.0	160/150	7.86	3.00	15.72	6.00	4.54	1.09	5.14	7.27	1.36
	8.0	180/170	8.91	3.40	17.82	6.80	4.80	1.09	5.14	7.27	1.36
	8.0	200/190	9.96	3.80	19.91	7.60	5.06	1.09	5.14	7.27	1.36
	8.0	220/210	11.00	4.20	22.01	8.40	5.14	1.09	5.14	7.27	1.36
	8.0	240/230	12.05	4.60	24.10	9.20	5.14	1.09	5.14	7.27	1.36
	8.0	260/250	13.10	5.00	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	280/270	14.15	5.40	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	300/290	15.20	5.80	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	325/315	16.51	6.30	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	350/340	17.82	6.80	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	375/365	19.13	7.30	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	400/390	20.44	7.80	24.10	10.00	5.14	1.09	5.14	7.27	1.36
	8.0	450/428	22.37	8.54	24.10	10.00	5.14	1.09	5.14	7.27	1.36
8.0	500/478	24.10	9.54	24.10	10.00	5.14	1.09	5.14	7.27	1.36	
8.0	600/578	24.10	10.00	24.10	10.00	5.14	1.09	5.14	7.27	1.36	
ø 10.0	10.0	120/108	6.75	2.70	13.50	5.40	5.08	1.15	6.33	8.66	2.13
	10.0	160/148	9.25	3.70	18.50	7.40	6.05	1.57	7.47	9.91	2.13
	10.0	180/168	10.50	4.20	21.00	8.40	6.36	1.70	7.47	10.53	2.13
	10.0	200/188	11.75	4.70	23.50	9.40	6.67	1.70	7.47	10.57	2.13
	10.0	220/208	13.00	5.20	26.00	10.40	6.99	1.70	7.47	10.57	2.13
	10.0	240/228	14.25	5.70	28.50	11.40	7.30	1.70	7.47	10.57	2.13
	10.0	260/248	15.50	6.20	31.00	12.40	7.47	1.70	7.47	10.57	2.13
	10.0	280/268	16.75	6.70	33.50	13.40	7.47	1.70	7.47	10.57	2.13

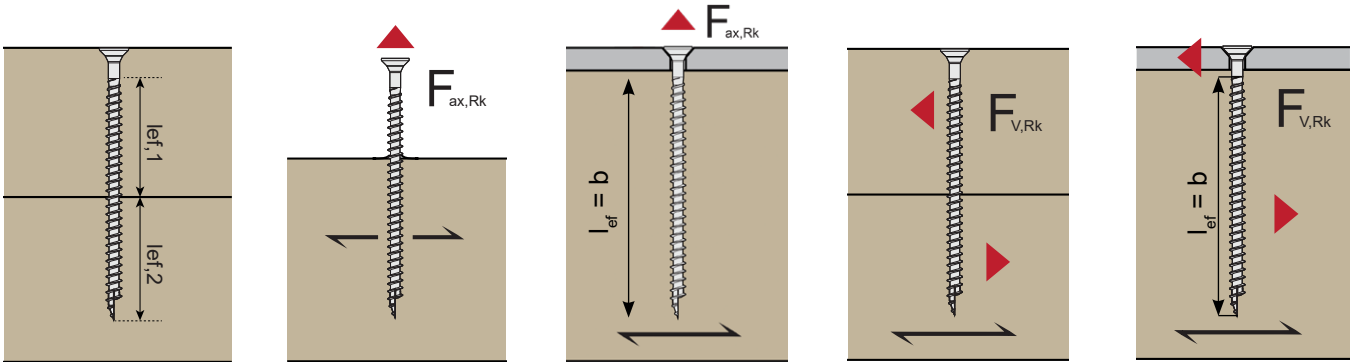


		AXIAL 90°				SHEAR 90°					
		TIMBER - TIMBER		METAL - TIMBER		TIMBER - TIMBER		METAL - TIMBER			
		$l_{ef} = b/2$		$l_{ef} = b$		$l_{ef} = b/2$		$l_{ef} = b$			
\emptyset	L/b	$F_{ax,Rk}$	$F_{ax,ASD}$	$F_{ax,Rk}$	$F_{ax,ASD}$	$F_{v,Rk}$	$F_{v,ASD}$	$F_{v,Rk,thin}$	$F_{v,Rk,thick}$	$F_{v,ASD}$	
[mm]	[mm]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	
Ø 10.0	10.0	300/288	18.00	7.20	36.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	325/301	18.81	7.53	37.63	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	350/326	20.38	8.15	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	375/351	21.94	8.78	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	400/376	23.50	9.40	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	450/426	26.63	10.65	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	500/476	29.75	11.90	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	600/576	36.00	14.00	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	700/676	40.00	14.00	40.00	14.00	7.47	1.70	7.47	10.57	2.13
	10.0	800/776	40.00	14.00	40.00	14.00	7.47	1.70	7.47	10.57	2.13
10.0	1000/976	40.00	14.00	40.00	14.00	7.47	1.70	7.47	10.57	2.13	
Ø 12.0	12.0	200/180	12.10	5.40	24.19	10.80	7.60	2.30	9.16	12.52	3.06
	12.0	220/200	13.44	6.00	26.88	12.00	7.94	2.45	9.16	12.95	3.06
	12.0	240/220	14.78	6.60	29.57	13.20	8.27	2.45	9.16	12.95	3.06
	12.0	260/240	16.13	7.20	32.26	14.40	8.61	2.45	9.16	12.95	3.06
	12.0	280/260	17.47	7.80	34.94	15.60	8.95	2.45	9.16	12.95	3.06
	12.0	300/280	18.82	8.40	37.63	16.80	9.16	2.45	9.16	12.95	3.06
	12.0	350/330	22.18	9.90	44.35	18.00	9.16	2.45	9.16	12.95	3.06
	12.0	400/380	25.54	11.40	46.70	18.00	9.16	2.45	9.16	12.95	3.06
	12.0	500/480	32.26	14.40	46.70	18.00	9.16	2.45	9.16	12.95	3.06
	12.0	600/580	38.98	17.40	46.70	18.00	9.16	2.45	9.16	12.95	3.06
	12.0	700/680	45.70	18.00	46.70	18.00	9.16	2.45	9.16	12.95	3.06
	12.0	800/780	46.70	18.00	46.70	18.00	9.16	2.45	9.16	12.95	3.06
12.0	1000/980	46.70	18.00	46.70	18.00	9.16	2.45	9.16	12.95	3.06	

RAPID[®] full thread countersunk head





Values apply to the RAPID[®] full thread countersunk head with and without half tip

Characteristics and values for C24				
d	[mm]	ø 8	ø 10	ø 12
d_k	[mm]	15.0	18.5	21.0
d_i	[mm]	5.10	6.30	7.00
$f_{ax,90,k}$	[N/mm ²]	13.1	12.5	11.2
$f_{head,k}$	[N/mm ²]	12.4	12.2	10.3
$F_{tens,k}$	[kN]	24.1	40.0	46.7
$M_{y,k}$	[Nmm]	20 300	36 700	48 500
$N_{pl,k \cdot kc}^{(*)}$	[kN]	12.2	18.9	23.6

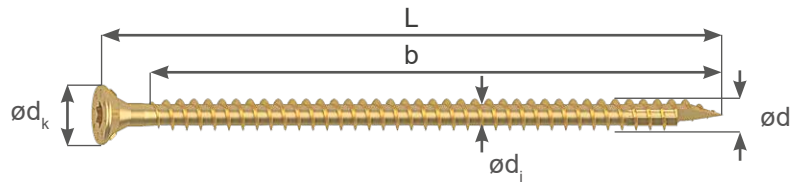

(*) total screw length in timber

		AXIAL 45°			SHEAR 45°			
		CROSS-TYPE SCREW FITTING			TIMBER - TIMBER		METAL - TIMBER	
		$l_{ef} = b/2$			$l_{ef} = b/2$		$l_{ef} = b$	
ø	L/b	$F_{v,X1,Rk}$	$F_{v,X2,Rk}$	$F_{v,X3,Rk}$	$F_{v,Rk}$	$F_{v,ASD}$	$F_{V,Rk}$	$F_{v,ASD}$
[mm]	[mm]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
ø 8.0	120/110	8.15	14.67	22.01	5.09	1.94	10.19	3.89
	140/130	9.63	17.34	26.01	6.02	2.30	12.04	4.60
	160/150	11.12	20.01	30.01	6.95	2.65	13.89	5.30
	180/170	12.60	22.68	34.01	7.87	3.01	15.75	6.01
	200/190	14.08	25.34	38.02	8.80	3.36	17.60	6.72
	220/210	15.56	28.01	42.02	9.73	3.71	19.45	7.42
	240/230	16.58	29.84	44.76	10.65	4.07	21.30	8.13
	260/250	17.32	31.17	46.76	11.58	4.42	21.30	8.84
	280/270	18.06	32.51	48.76	12.51	4.77	21.30	8.84
	300/290	18.80	33.84	50.76	13.43	5.13	21.30	8.84
	325/315	19.73	35.51	53.26	14.59	5.57	21.30	8.84
	350/340	20.65	37.18	55.76	15.75	6.01	21.30	8.84
	375/365	21.58	38.84	58.26	16.91	6.45	21.30	8.84
	400/390	22.51	40.51	60.77	18.06	6.89	21.30	8.84
	450/428	23.88	42.98	64.47	19.78	7.55	21.30	8.84
	500/478	25.10	45.17	67.76	21.30	8.43	21.30	8.84
600/578	25.10	45.17	67.76	21.30	8.84	21.30	8.84	
ø 10.0	120/108	9.55	17.18	25.77	5.97	2.39	11.93	4.77
	160/148	13.08	23.55	35.32	8.18	3.27	16.35	6.54
	180/168	14.85	26.73	40.09	9.28	3.71	18.56	7.42
	200/188	16.62	29.91	44.87	10.39	4.15	20.77	8.31
	220/208	18.38	33.09	49.64	11.49	4.60	22.98	9.19
	240/228	20.15	36.27	54.41	12.60	5.04	25.19	10.08
	260/248	21.92	39.46	59.18	13.70	5.48	27.40	10.96
	280/268	23.69	42.64	63.96	14.81	5.92	29.61	11.84

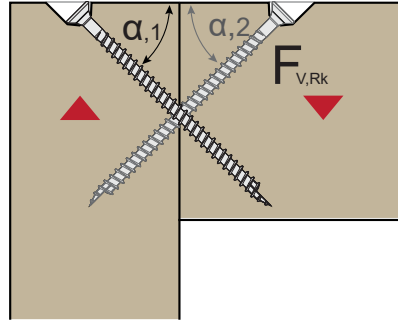

		AXIAL 45°			SHEAR 45°				
		CROSS-TYPE SCREW FITTING			TIMBER - TIMBER	METAL - TIMBER			
		$l_{ef} = b/2$			$l_{ef} = b/2$	$l_{ef} = b$			
\emptyset	L/b	$F_{v,X1,Rk}$	$F_{v,X2,Rk}$	$F_{v,X3,Rk}$	$F_{v,Rk}$	$F_{v,ASD}$	$F_{V,Rk}$	$F_{v,ASD}$	
[mm]	[mm]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]	
Ø 10.0	10.0	300/288	25.26	45.46	68.19	15.91	6.36	31.82	12.37
	10.0	325/301	25.83	46.49	69.74	16.63	6.65	33.26	12.37
	10.0	350/326	26.93	48.48	72.72	18.01	7.20	35.36	12.37
	10.0	375/351	28.04	50.47	75.71	19.39	7.76	35.36	12.37
	10.0	400/376	29.14	52.46	78.69	20.77	8.31	35.36	12.37
	10.0	450/426	31.35	56.44	84.66	23.53	9.41	35.36	12.37
	10.0	500/476	33.56	60.41	90.62	26.30	10.52	35.36	12.37
	10.0	600/576	37.98	68.37	102.55	31.82	12.37	35.36	12.37
	10.0	700/676	40.81	73.46	110.19	35.36	12.37	35.36	12.37
	10.0	800/776	40.81	73.46	110.19	35.36	12.37	35.36	12.37
10.0	1000/976	40.81	73.46	110.19	35.36	12.37	35.36	12.37	
Ø 12.0	12.0	200/180	17.11	30.79	46.19	10.69	4.77	21.38	9.55
	12.0	220/200	19.01	34.21	51.32	11.88	5.30	23.76	10.61
	12.0	240/220	20.91	37.63	56.45	13.07	5.83	26.13	11.67
	12.0	260/240	22.81	41.06	61.58	14.26	6.36	28.51	12.73
	12.0	280/260	24.71	44.48	66.71	15.44	6.89	30.89	13.79
	12.0	300/280	26.61	47.90	71.85	16.63	7.42	33.26	14.85
	12.0	350/330	31.36	56.45	84.68	19.60	8.75	39.20	15.91
	12.0	400/380	33.79	60.82	91.23	22.57	10.08	41.28	15.91
	12.0	500/480	38.54	69.37	104.06	28.51	12.73	41.28	15.91
	12.0	600/580	43.29	77.92	116.89	34.45	15.38	41.28	15.91
	12.0	700/680	48.04	86.48	129.72	40.39	15.91	41.28	15.91
	12.0	800/780	48.75	87.76	131.63	41.28	15.91	41.28	15.91
	12.0	1000/980	48.75	87.76	131.63	41.28	15.91	41.28	15.91

Values for C24 ($\rho_k=350\text{kg/m}^3$), axial axis to grain: $30^\circ - 90^\circ$, $F_{ax,Rk}$ = thread withdrawal, $F_{head,Rk}$ = head pull through, $F_{v,Rk}$ = shear (\parallel to grain $0^\circ - \perp$ to grain 90°), wood/steel plate: l_{ef} = thread length b , $t_1 \text{ min}$ = minimum wood thickness, $t_1 \text{ max}$ = maximum wood thickness add-on part (L-b), $F_{V,Rk,thin}$ = steel sheet $t \leq d/2$, $F_{V,Rk,thick}$ = steel sheet $t \geq d$
 Type and printing errors reserved. The values stated are meant to serve as planning guides; projects should only be undertaken by authorised professionals.


RAPID[®] full thread cylinder head

Values apply to the RAPID[®] FT CL with core fins tip and to the RAPID[®] FT CL with half tip. The RAPID[®] FT cylinder head is not suitable for timber/steel plate screw fittings: our range has the RAPID[®] FT countersunk head for this.

Characteristics and values for C24


d	[mm]	ø 8	ø 10
d_k	[mm]	10.2	13.4
d_i	[mm]	5.10	6.30
$f_{ax,90,k}$	[N/mm ²]	13.1	12.5
$f_{head,k}$	[N/mm ²]	0	0
$F_{tens,k}$	[kN]	24.1	40.0
$M_{y,k}$	[Nmm]	20 300	36 700
$N_{pl,k - kc}^{(*)}$	[kN]	12.2	18.9


(*) total screw length in timber

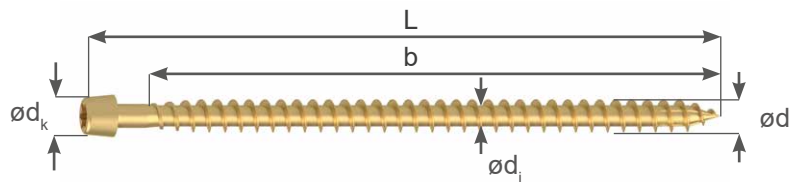

AXIAL 90°	SHEAR 90°
HEAD PULL THROUGH	TIMBER - TIMBER
$l_{ef} = b/2$	$l_{ef} = b/2$

ø	[mm]	L/b	[mm]	AXIAL 90°		SHEAR 90°	
				$F_{ax,Rk}$	$F_{ax,ASD}$	$F_{v,Rk}$	$F_{v,ASD}$
ø 8.0	8.0	120/110		5.76	2.20	4.01	0.94
	8.0	140/130		6.81	2.60	4.27	1.09
	8.0	160/150		7.86	3.00	4.54	1.09
	8.0	180/170		8.91	3.40	4.80	1.09
	8.0	200/190		9.96	3.80	5.06	1.09
	8.0	220/210		11.00	4.20	5.14	1.09
	8.0	240/230		12.05	4.60	5.14	1.09
	8.0	260/250		13.10	5.00	5.14	1.09
	8.0	280/270		14.15	5.40	5.14	1.09
	8.0	300/290		15.20	5.80	5.14	1.09
	8.0	325/315		16.51	6.30	5.14	1.09
	8.0	350/340		17.82	6.80	5.14	1.09
	8.0	375/365		19.13	7.30	5.14	1.09
	8.0	400/390		20.44	7.80	5.14	1.09
	8.0	450/428		22.37	8.54	5.14	1.09
	8.0	500/478		24.10	9.54	5.14	1.09
8.0	600/578		24.10	10.00	5.14	1.09	

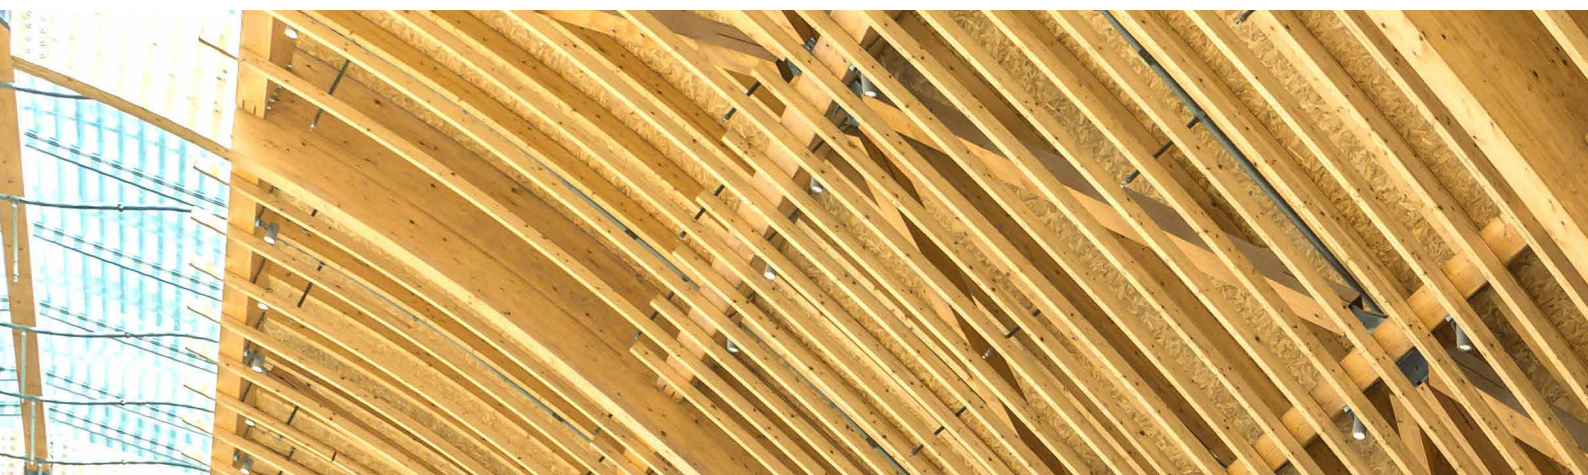

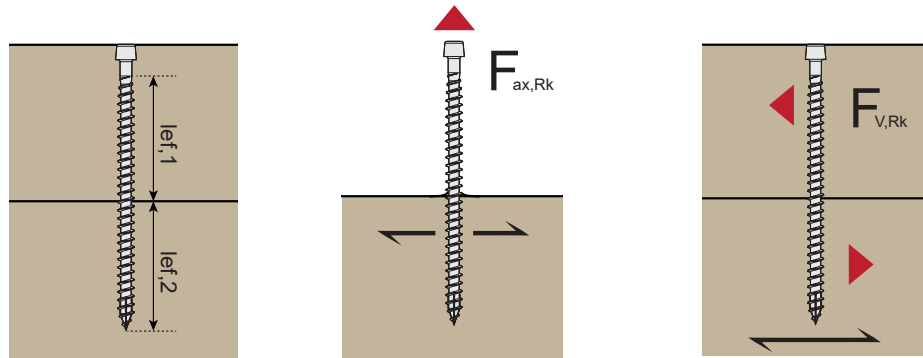

AXIAL 90°		SHEAR 90°	
HEAD PULL THROUGH		TIMBER - TIMBER	
$l_{ef} = b/2$		$l_{ef} = b/2$	

Ø	L/b	AXIAL 90°		SHEAR 90°	
		$F_{ax,Rk}$	$F_{ax,ASD}$	$F_{v,Rk}$	$F_{v,ASD}$
[mm]	[mm]	[kN]	[kN]	[kN]	[kN]
Ø 10.0	200/188	11.75	4.70	6.67	1.70
	240/228	14.25	5.70	7.30	1.70
	260/248	15.50	6.20	7.47	1.70
	280/268	16.75	6.70	7.47	1.70
	300/288	18.00	7.20	7.47	1.70
	325/301	18.81	7.53	7.47	1.70
	350/326	20.38	8.15	7.47	1.70
	375/351	21.94	8.78	7.47	1.70
	400/376	23.50	9.40	7.47	1.70
	450/426	26.63	10.65	7.47	1.70
	500/476	29.75	11.90	7.47	1.70
	600/576	36.00	14.00	7.47	1.70
	700/676	40.00	14.00	7.47	1.70
	800/776	40.00	14.00	7.47	1.70
	1000/976	40.00	14.00	7.47	1.70




RAPID[®] full thread cylinder head

Values apply to the RAPID[®] FT CL with core fins tip and to the RAPID[®] FT CL with half tip.
The RAPID[®] FT cylinder head is not suitable for timber/steel plate screw fittings; our range has the RAPID[®] FT countersunk head for this.

Characteristics and values for C24

d	[mm]	ø 8	ø 10
d _k	[mm]	10.2	13.4
d _i	[mm]	5.10	6.30
f _{ax,90,k}	[N/mm ²]	13.1	12.5
f _{head,k}	[N/mm ²]	0	0
F _{tens,k}	[kN]	24.1	40.0
M _{y,k}	[Nmm]	20 300	36 700
N _{pl,k - kc} (*)	[kN]	12.2	18.9

(*) total screw length in timber

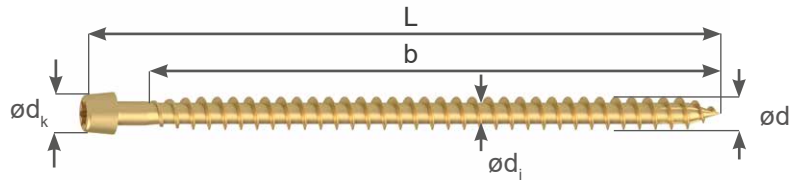


AXIAL 45°			SHEAR 45°	
CROSS-TYPE SCREW FITTING			TIMBER - TIMBER	
l _{ef} = b/2			l _{ef} = b/2	

ø	L/b	F _{v,X1,Rk}	F _{v,X2,Rk}	F _{v,X3,Rk}	F _{v,Rk}	F _{v,ASD}
ø 8.0	120/110	8.15	14.67	22.01	5.09	1.94
	140/130	9.63	17.34	26.01	6.02	2.30
	160/150	11.12	20.01	30.01	6.95	2.65
	180/170	12.60	22.68	34.01	7.87	3.01
	200/190	14.08	25.34	38.02	8.80	3.36
	220/210	15.56	28.01	42.02	9.73	3.71
	240/230	16.58	29.84	44.76	10.65	4.07
	260/250	17.32	31.17	46.76	11.58	4.42
	280/270	18.06	32.51	48.76	12.51	4.77
	300/290	18.80	33.84	50.76	13.43	5.13
	325/315	19.73	35.51	53.26	14.59	5.57
	350/340	20.65	37.18	55.76	15.75	6.01
	375/365	21.58	38.84	58.26	16.91	6.45
	400/390	22.51	40.51	60.77	18.06	6.89
	450/428	23.88	42.98	64.47	19.78	7.55
	500/478	25.10	45.17	67.76	21.30	8.43
600/578	25.10	45.17	67.76	21.30	8.84	





Values for C24 ($\rho_k = 350 \text{ kg/m}^3$),
 Axial axis to grain: $30^\circ - 90^\circ$,
 $F_{ax,Rk}$ = thread withdrawal,
 $F_{v,Rk}$ = shear ($//$ to grain $0^\circ - \perp$ to grain 90°),

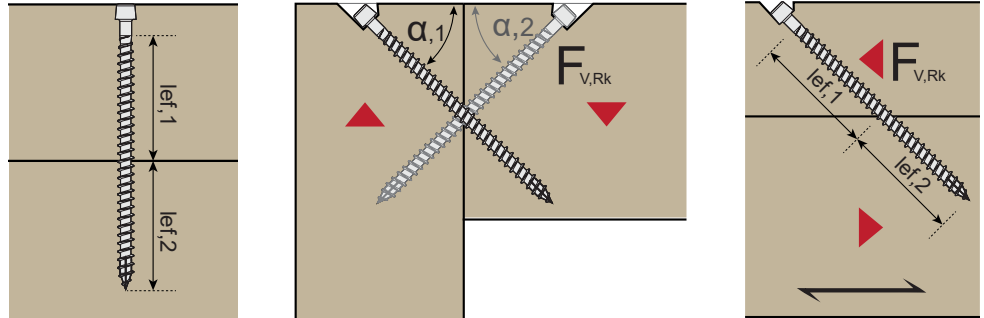

			AXIAL 45°			SHEAR 45°	
			CROSS-TYPE SCREW FITTING			TIMBER - TIMBER	
			$l_{ef} = b/2$			$l_{ef} = b/2$	
\emptyset	L/b		$F_{v,X1,Rk}$	$F_{v,X2,Rk}$	$F_{v,X3,Rk}$	$F_{v,Rk}$	$F_{v,ASD}$
[mm]	[mm]		[kN]	[kN]	[kN]	[kN]	[kN]
\emptyset 10.0	10.0	200/188	16,62	29,91	44,87	10.39	4.15
	10.0	240/228	20,15	36,27	54,41	12.60	5.04
	10.0	260/248	21,92	39,46	59,18	13.70	5.48
	10.0	280/268	23,69	42,64	63,96	14.81	5.92
	10.0	300/288	25,26	45,46	68,19	15.91	6.36
	10.0	325/301	25,83	46,49	69,74	16.63	6.65
	10.0	350/326	26,93	48,48	72,72	18.01	7.20
	10.0	375/351	28,04	50,47	75,71	19.39	7.76
	10.0	400/376	29,14	52,46	78,69	20.77	8.31
	10.0	450/426	31,35	56,44	84,66	23.53	9.41
	10.0	500/476	33,56	60,41	90,62	26.30	10.52
	10.0	600/576	37,98	68,37	102,55	31.82	12.37
	10.0	700/676	40,81	73,46	110,19	35.36	12.37
	10.0	800/776	40,81	73,46	110,19	35.36	12.37
	10.0	1000/976	40,81	73,46	110,19	35.36	12.37

Type and printing errors reserved. The values stated are meant to serve as planning guides; projects should only be undertaken by authorised professionals.

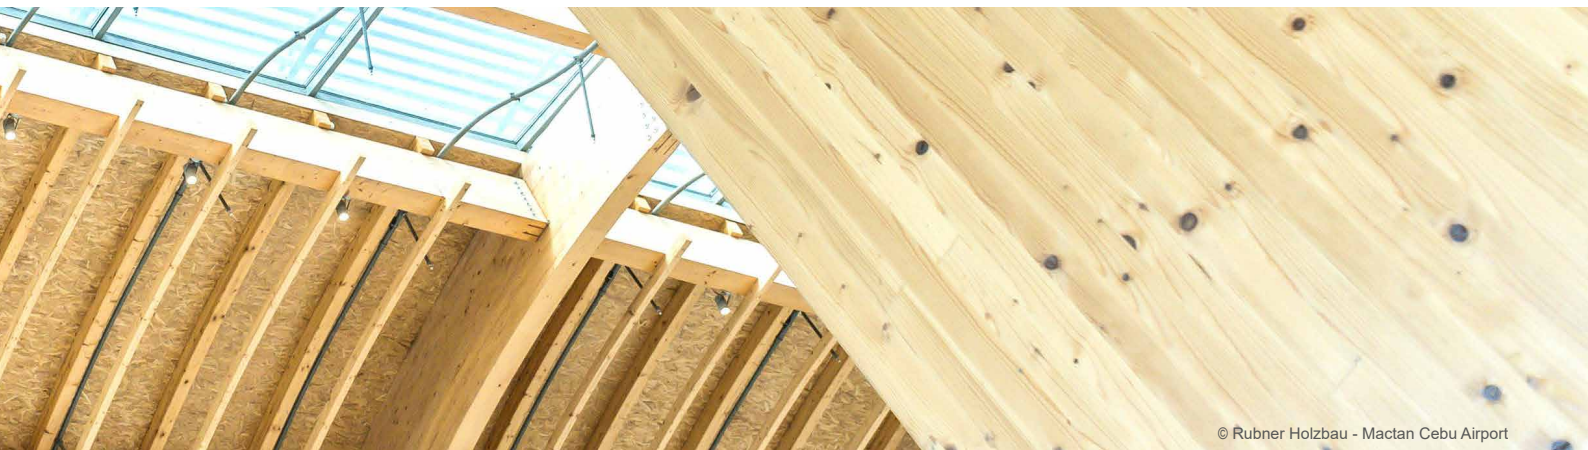

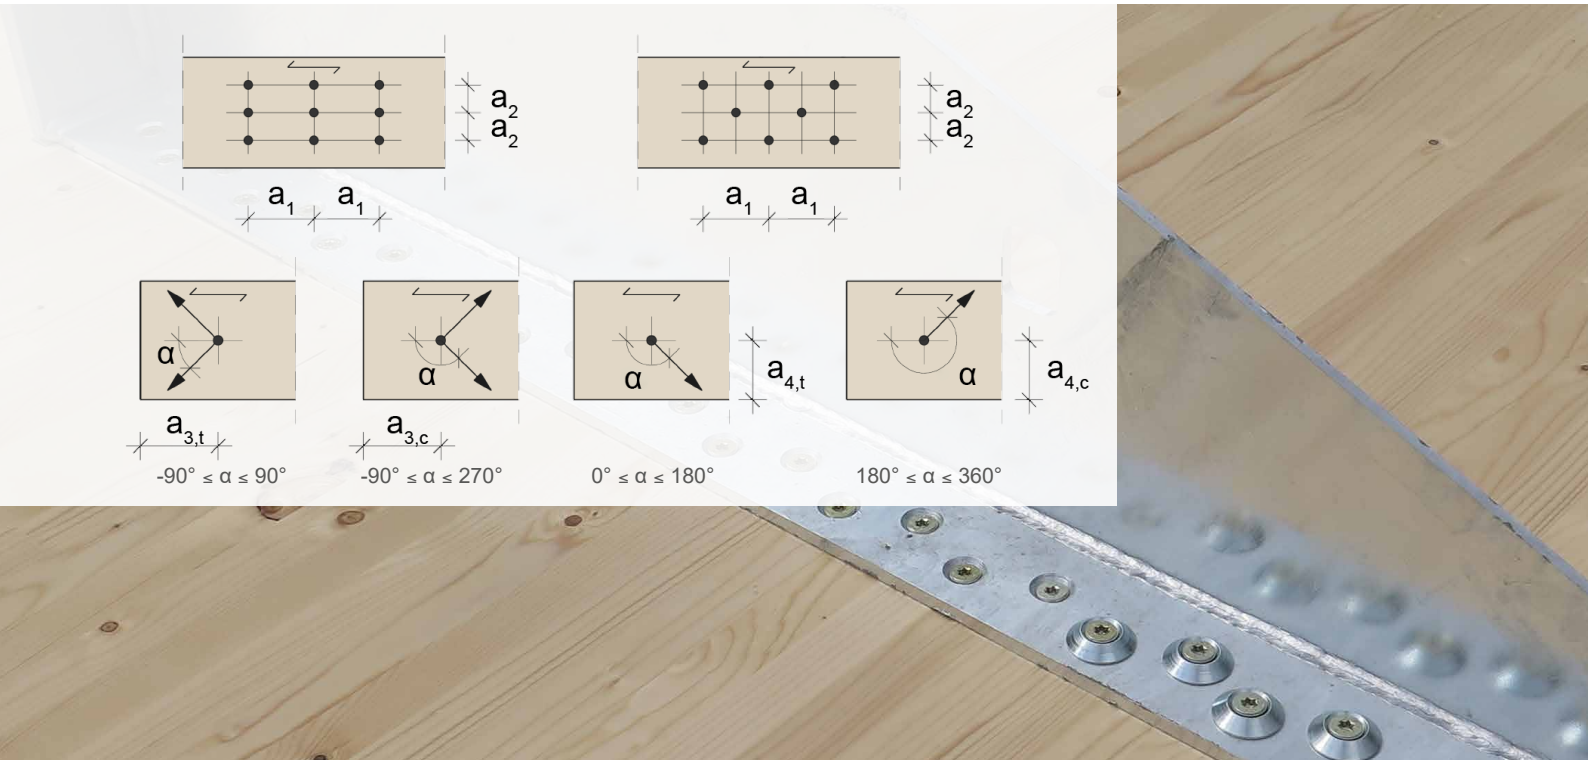

Information

- Geometry and mechanical properties correspond to ETA 12/0373.
- In connections between main and secondary beams, the main beam must be able to adequately with stand torsion and fixed with fork support.
- The values stated for main/secondary beam connections only apply to vertically oriented loads. Any transverse stress must be verified separately.
- The rope effect has been factored into the calculation of shear-off values.
- Permissible values F_{ASD} load: Design according to DIN 1052:1988 and German licences Z-9.1-564 for RAPID® partial thread, Z-9.1-435 for StarDrive GPR®, Z-9.1-656 for RAPID® full thread, these lower values are only intended as guidance.
- Characteristic values F_{Rk} : Design according to EC5 and ETA 12/0373, these values should be used for calculations
- The design value of the ultimate limit state $F_{v,Rd}$ for the final design of the timber connection is taken from the characteristic values as follows:

$$F_{Rd} = \frac{F_{Rk} \cdot k_{mod}}{Y_m}$$

F_{Rd} ... Design value of ultimate limit state subjected to shear-off stress or tension depending on connection
 F_{Rk} ... characteristic value of ultimate limit state subjected to shear-off stress or tension depending on connection
 Y_m, k_{mod} ... Additional values from corresponding national norms